

2021 EQUIPMENT CATALOG



INTRODUCED 1971

PRESSURE WASHERS



COLD WATER / HOT WATER
GASOLINE / ELECTRIC / DIESEL / NATURAL GAS/LP
DIRECT DRIVE / BELT DRIVE

Cold Water – Gasoline – Direct Drive

Contractors love the powerful JP Series for its portable design and great cleaning ability. It removes dirt, mud, mold and mildew effortlessly from almost any surface, plus it is easy to move from one jobsite to the next.



JP-2703-3MHB

PRESSURE WASHERS

Pump:

Equipped with the Mi-T-M Pressure Relief Start which eliminates pressure build-up in the system ♦ Forged brass manifold ♦ Thermal relief valve ♦ In-line water strainer

Frame:

Powder coated steel frame and base plate with 1 1/4-inch tube handles ♦ Convenient gun/wand holder and hose wrap ♦ 13-inch flat-free tires (10-inch tires on 2400, 2700 and 3000-PSI models)

Unit Includes:

Quick connect nozzles - 0°, 15° and 25° ♦ 50-foot x 3/8-inch non-marking high pressure hose with quick connects ♦ Professional-grade insulated trigger gun with safety lock-off

Limited Warranties:

1 year Mi-T-M unloader ♦ 3 year Honda engine ♦ 7 year AR and Mi-T-M pumps

Certification:

Intertek – Certified to UL-1776



MODEL NUMBER	PSI	GPM	DISPLACEMENT/ENGINE	PUMP	MI-T-M NO.	UNLOADER	LANCE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
JP-2403-3MHB	2400	2.4	196cc Honda GX200 OHV	Mi-T-M	3-0415	Mi-T-M, adjustable pressure	36in.	37x21x24.5in.	100 lb.	75 lb.
JP-2703-3MHB	2700	2.4	196cc Honda GX200 OHV	Mi-T-M	3-0415	Mi-T-M, adjustable pressure	36in.	37x21x24.5in.	110 lb.	85 lb.
JP-3003-3MHB	3000	3.0	270cc Honda GX270 OHV	AR	3-0389	Mi-T-M, adjustable pressure	36in.	40x22.5x24.5in.	180 lb.	130 lb.
JP-3504-3MHB	3500	3.5	389cc Honda GX390 OHV	AR	3-0310	Mi-T-M, adjustable pressure	48in.	40x22.5x24.5in.	192 lb.	142 lb.
JP-4004-3MHB	4000	3.5	389cc Honda GX390 OHV	AR	3-0310	Mi-T-M, adjustable pressure	48in.	40x22.5x24.5in.	192 lb.	142 lb.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
50-0161	High pressure detergent injector	All models	CX-0005	36-in. insulated dual lance	2400 to 3000-PSI models
851-0338	50-ft. x 3/8-in. non-marking high pressure hose	All models	CX-0083	External bypass system	JP-2403-3MHB & JP-2703-3MHB
AW-8400-0021	Low pressure detergent injector	All models	CX-0084	External bypass system	JP-3504-3MHB & JP-4004-3MHB

CBA Aluminum Series

Cold Water – Gasoline – Belt Drive

Industrial cleaning contractors love the powerful and lightweight CBA Aluminum Series because it delivers high performance on a routine basis. It has the power to blast through the toughest dirt and grime. Stains on brickwork and concrete are no match for this mighty machine.



PRESSURE WASHERS

CBA-4004-1MGM shown with extended reach wand AW-7013-1800

Pump:

Equipped with the Mi-T-M Pressure Relief Start which eliminates pressure build-up in the system (AR pump models) ♦ External bypass system allows more water into the system to protect from heat build-up (CAT and General pump models) ♦ Forged brass manifold ♦ Thermal relief valve ♦ Water filter with clear sleeve for screen inspection

Frame:

Lightweight, corrosion-resistant aluminum frame and base plate with 1½-inch tube handles ♦ Patented vibration isolation plate with four rubber isolators ♦ Convenient gun/wand holder ♦ Two-piece belt guard for quick access to belts ♦ 13-inch flat-free tires

Unit Includes:

Quick connect nozzles - 0°, 15°, 25° and 40° ♦ 50-foot x ¾-inch non-marking high pressure hose with quick connects ♦ Professional-grade insulated trigger gun with safety lock-off

Limited Warranties:

1 year Mi-T-M unloader ♦ 3 year Honda and Kohler engines ♦ 7 year AR, CAT and General pumps

Certification:

Intertek – Certified to UL-1776

MODEL NUMBER	PSI	GPM	DISPLACEMENT/ENGINE	PUMP	MI-T-M NO.	UNLOADER	LANCE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
CBA-3504-1MAH	3500	3.7	389cc Honda GX390 OHV	AR	3-0308	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	215 lb.	165 lb.
CBA-3504-1MAK	3500	3.7	429cc Kohler CH440 OHV	AR	3-0308	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	215 lb.	165 lb.
CBA-3504-1MGH	3500	4.0	389cc Honda GX390 OHV	General	3-0393	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	215 lb.	165 lb.
CBA-4004-1MAH	4000	3.4	389cc Honda GX390 OHV	AR	3-0308	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	215 lb.	165 lb.
CBA-4004-1MAK	4000	3.4	429cc Kohler CH440 OHV	AR	3-0308	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	215 lb.	165 lb.
CBA-4004-1MCH	4000	3.7	389cc Honda GX390 OHV	CAT	3-0450	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	206 lb.	156 lb.
CBA-4004-1MGH	4000	4.0	389cc Honda GX390 OHV	General	3-0393	Mi-T-M, adjustable pressure	48in.	47x27.5x28.5in.	215 lb.	165 lb.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
50-0161	High pressure detergent injector	All models	AW-8400-0021	Low pressure detergent injector	All models
851-0338	50-ft. x ¾-in. non-marking high pressure hose	All models	CX-0082	External bypass system	All AR pump models

CW Premium Series

Cold Water – Gasoline – Belt Drive

Known as the workhorse of the Mi-T-M industrial pressure washer line, the durable CW Premium Series takes cleaning to the next level. It is built for extended cleaning applications and has what it takes to get the big jobs done.



CW-3504-5MGH

PRESSURE WASHERS

Pump:

External bypass system allows more water into the system to protect from heat build-up ♦ Forged brass manifold (Nickel plated brass on 4000-PSI models) ♦ Thermal relief valve ♦ Water filter with clear sleeve for screen inspection

Frame:

Powder coated steel frame and base plate with 1¼-inch tube handles ♦ Convenient gun/wand holder and hose wrap ♦ Two-piece belt guard for quick access to belts ♦ 13-inch flat-free tires

Component:

Heavy-duty belt drive system

Unit Includes:

Quick connect nozzles - 0°, 15°, 25° and 40° ♦ 50-foot x ¾-inch non-marking high pressure hose with quick connects ♦ Professional-grade insulated trigger gun with safety lock-off

Limited Warranties:

1 year Mi-T-M unloader (3500 and 4000-PSI models) ♦ 3 year Honda and Vanguard engines ♦ 10 year General pump

Certification:

Intertek – Certified to UL-1776

MODEL NUMBER	PSI	GPM	DISPLACEMENT/ENGINE	PUMP	MI-T-M NO.	UNLOADER	LANCE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
CW-2505-4MGH	2500	4.4	389cc Honda GX390 OHV	General	3-0202	Factory preset	36in.	45.5x28x26in.	290 lb.	216 lb.
CW-3004-4MGH	3000	3.5	389cc Honda GX390 OHV	General	3-0202	Factory preset	36in.	45.5x28x26in.	290 lb.	216 lb.
CW-3504-5MGH	3500	3.8	389cc Honda GX390 OHV	General	3-0203	Mi-T-M, factory preset	48in.	46x28x30in.	290 lb.	216 lb.
CW-4004-5MGH	4000	3.5	389cc Honda GX390 OHV	General	3-0075	Mi-T-M, factory preset	48in.	46x28x30in.	290 lb.	216 lb.
CW-4004-5MVD	4000	4.0	480cc Vanguard OHV, electric start - sealed battery included	General	3-0075	Mi-T-M, factory preset	48in.	46x28x30in.	330 lb.	256 lb.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
50-0161	High pressure detergent injector	All models	CX-0005	36-in. insulated dual lance	CW-2505-4MGH & CW-3004-4MGH
851-0338	50-ft. x ¾-in. non-marking high pressure hose	All models	CX-0045	Electric start - battery included	All Honda models
AW-8400-0021	Low pressure detergent injector	All models	CX-0054	Roll cage	All Honda models
			CX-0055	Roll cage	CW-4004-5MVD

Hot Water Mini Trailer

Gasoline – Belt Drive – Trailer-Mount Pressure Washer

PRESSURE WASHERS



HMT-4004-OMGH

The compact design of the Mi-T-M hot water mini trailer offers ease of transport without sacrificing powerful cleaning capabilities. This trailer package is engineered with a durable powder coated steel frame, a rear locking storage area and an industrial 4000-PSI belt-driven pressure washer with a 12V Beckett burner.



Hot Water Mini Trailer

PRESSURE WASHERS



Pump:

Adjustable stainless-steel and brass unloader valve ♦ Forged brass manifold ♦ Thermal relief valve

Engine:

Remote engine start and choke ♦ 12V electric start – battery not included

Frame:

Reinforced powder coated steel frame ♦ Locking rear storage area – 2.875 cubic feet ♦ Sealed LED trailer lights ♦ 2-inch ball hitch ♦ Caster brake (Use when unhitched)

Components:

½-inch schedule 80 pipe coil with 4-pancake heat exchanger ♦ 12V Beckett burner ♦ No. 1 or No. 2 fuel oil, diesel or kerosene fired burner (Not approved for bio-fuel) ♦ Engine and burner hour meters ♦ 1,000-lb. axle

Miscellaneous:

Temperature rise 140°F/60°C above ambient

Safety Features:

Removable safety flag for transportation and guidance when backing up ♦ Recommended maximum speed is 65 mph ♦ DOT approved and National Association of Trailer Manufacturers (NATM) certified ♦ 250°F high temperature safety limit switch

Unit Includes:

Quick connect nozzles - 0°, 15°, 25° and 40° ♦ 50-foot x ¾-inch steel wire-braided high pressure hose with quick connects ♦ Professional-grade insulated trigger gun with safety lock-off ♦ Adjustable pressure insulated dual lance

Limited Warranties:

3 year Honda engine ♦ 7 year General pump



MODEL NUMBER	PSI	GPM	DISPLACEMENT/ENGINE	PUMP	MI-T-M NO.	ENGINE FUEL TANK CAPACITY	BURNER FUEL TANK CAP.	BURNER FUEL CONS.	BTU PER HOUR	TIRES	DIMENSIONS (LxWxH)	GROSS VEHICLE WT.
HMT-4004-OMGH	4000	3.7	389cc Honda GX390 OHV	General	3-0203	1.61 gallons	10.0 gallons	2.45 gph	343,000	(2) 4.80-8.8in. bias ply	99x43.5x36in.	1,000 lb.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODEL	PART NUMBER	DESCRIPTION	FITS MODEL
15-0160	75-ft. x ¾-in. high pressure hose	HMT-4004-OMGH	AW-8400-0021	Low pressure detergent injector	HMT-4004-OMGH
15-0161	100-ft. x ¾-in. high pressure hose	HMT-4004-OMGH	TX-0010	Adjustable trailer coupler hitch	HMT-4004-OMGH
20-1366A52	Black powder coated rain cap	HMT-4004-OMGH	TX-0020	High pressure hose reel	HMT-4004-OMGH

Pressure Washer Accessories

Extension Wands and Gutter Cleaner

PRESSURE WASHER ACCESSORIES



AW-7105-4800 shown
on CBA-3504-1MAH

High Temperature O-Rings

O-rings ensure a tight fit and prevent leaks with quick connect sockets.

- 25-0594** (3/8-inch high temp silicon)
 - Fits quick connect socket, 17-0004, on hot water outlets, for hoses
- 25-0595** (1/4-inch high temp silicon)
 - Fits quick connect socket, 17-0028, on wands



25-0594

Extension Wand

Designed to help you clean those hard to reach places.

- 50-0180**
 - 24-inch extension wand
 - Fits all CM and WP Series models



Aluminum Wand Extensions

These lightweight, aluminum wand extensions allow you to clean hard to reach areas with ease.

- AW-7105-3600** (36-inch)
- AW-7105-4800** (48-inch)
- AW-7105-7200** (72-inch)
- AW-7105-9600** (90-inch)

- 1/4-inch lance saver socket with quick connect plug
- 4000-PSI rated
- 12.0-GPM flow rate
- 300°F temperature rating



Gutter Cleaner

Turn your wand into an efficient rain gutter cleaner. Clean your gutters from the ground and blow out dirt, grime, leaves and anything else that may be stuck inside.

- 50-0201**
 - 4000-PSI maximum pressure
 - 1/4-inch quick connect socket outlet
 - 1/4-inch quick connect plug inlet



Pressure Washer Accessories

Extended Reach Wands

Extended Reach Wands

Clean hard to reach places like house siding and eaves, large farm equipment, semi-tractor trailers and multi-story buildings.

Fiberglass Wands

AW-7018-1200 (12-foot)

AW-7018-1800 (18-foot)

AW-7018-2400 (24-foot)

- Professional-grade trigger gun with safety lock-off
- Complete with quick connects
- Extends from 6-feet, 8-inches to 12, 18 or 24-feet
- Lightweight and easy to control
- Compatible with pressure washers rated up to 4000-PSI
- Easy hose retraction
- 200°F temperature rating

Aluminum Wand

AW-7017-1800 (18-foot)

- Professional-grade trigger gun with safety lock-off
- Complete with quick connects
- Extends from 6-feet, 5-inches to 18-feet
- Lever locks
- Compatible with pressure washers rated up to 4000-PSI
- Includes belt for additional support

Telescoping Wand Belt

The telescoping wand belt holds the telescoping wand to reduce operator fatigue and strain. It provides better operator control, optimizing cleaning performance.


AW-7015-0001

- Works with both fiberglass and aluminum wands
- Includes three plastic snap-on clips that snap at your shoulder, waist and the wand

AW-7018-1800 shown with telescoping wand belt, AW-7015-0001



WATER PUMPS

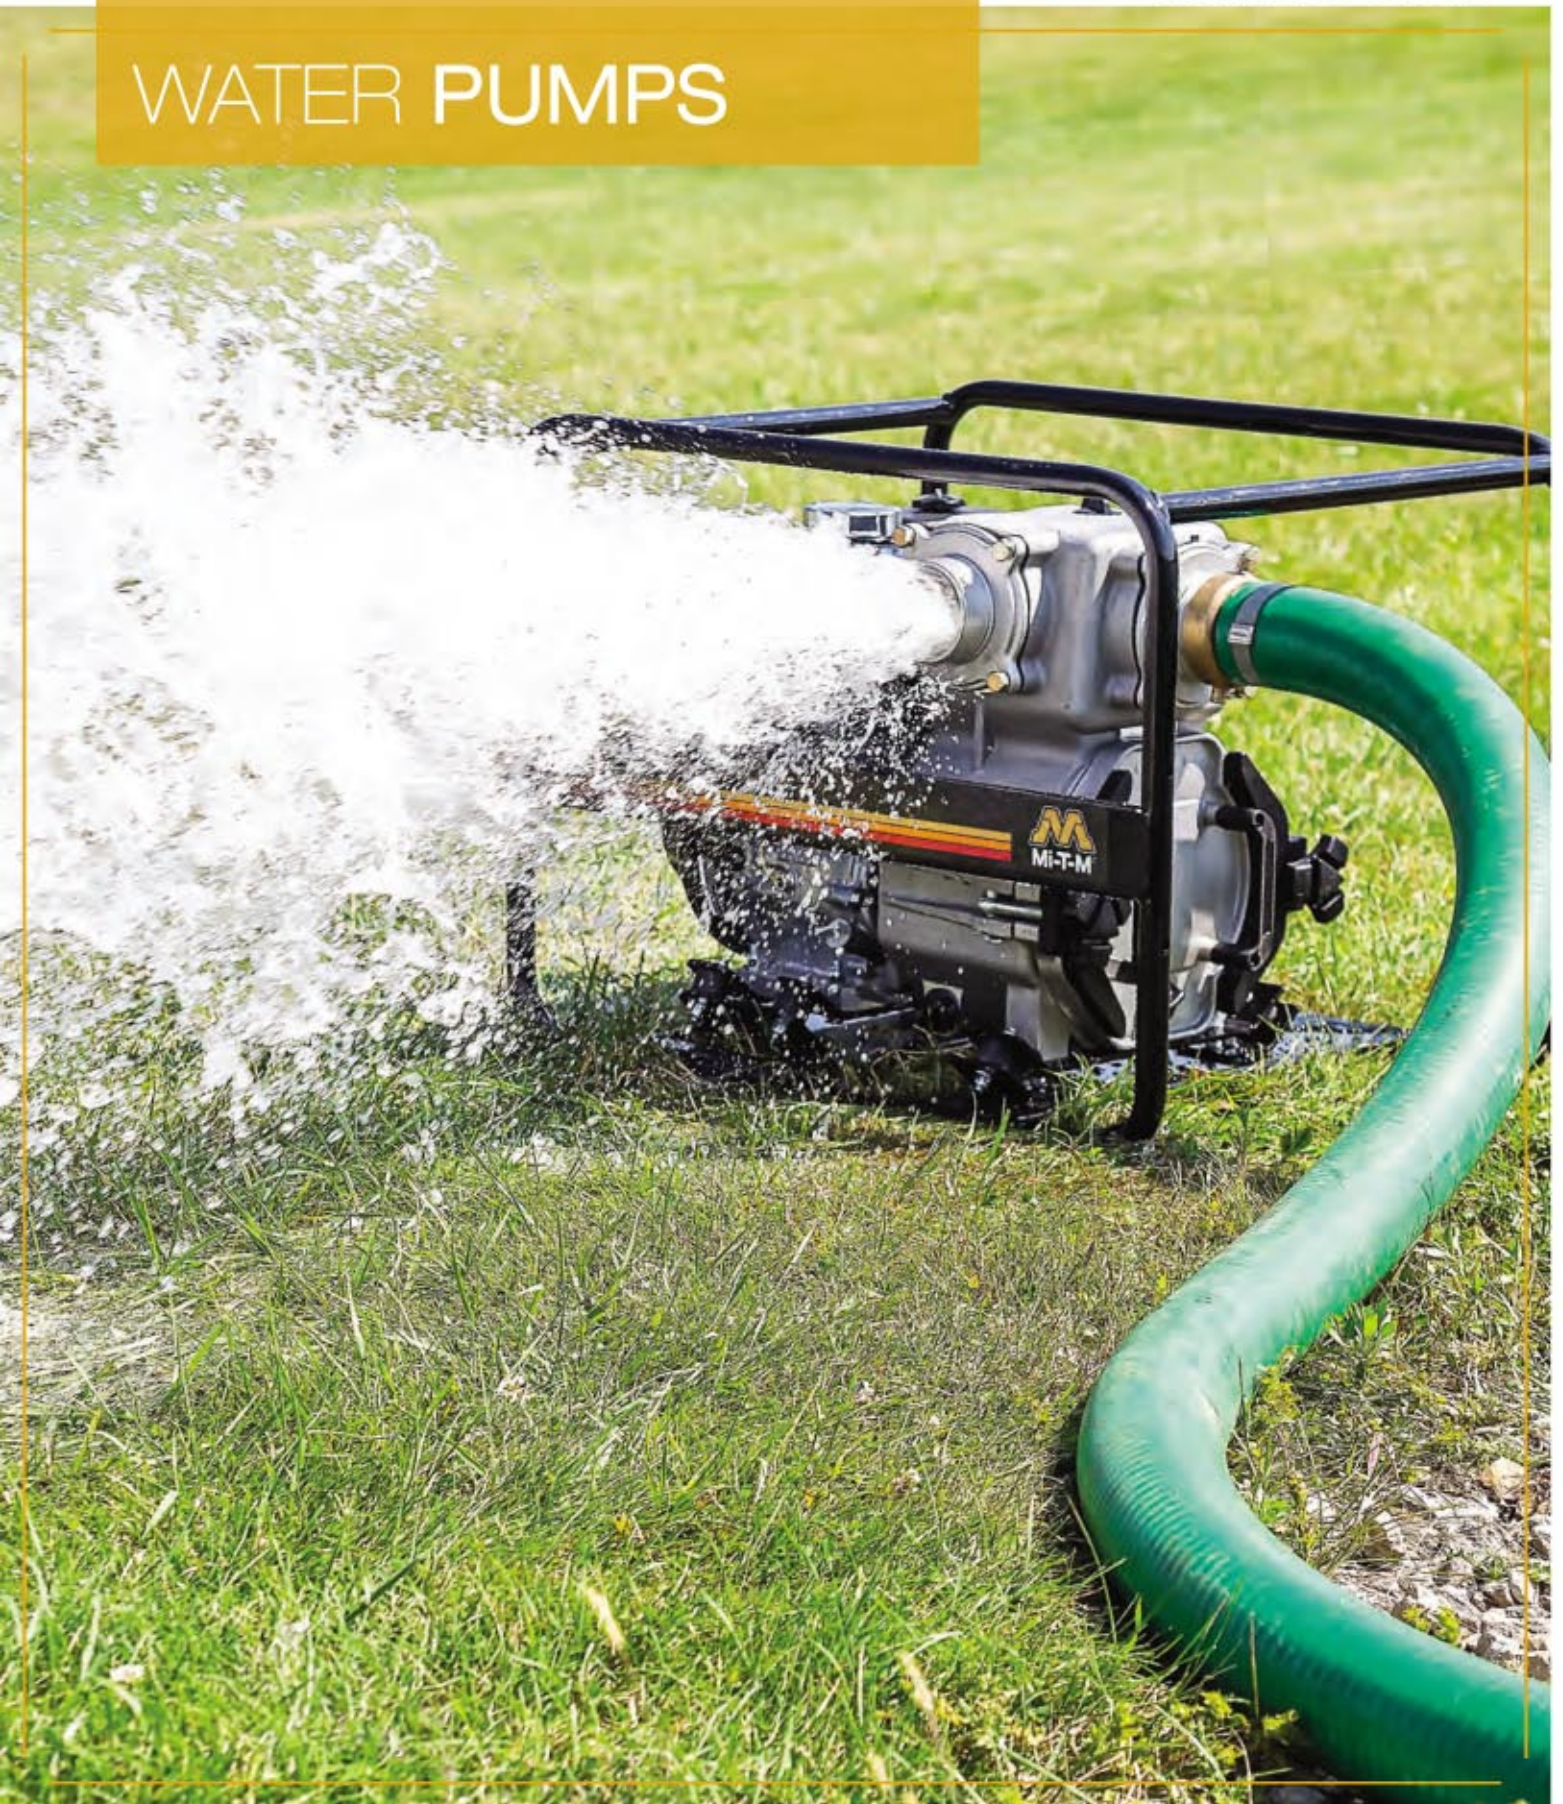

CHEMICAL/LIQUID FERTILIZER PUMPS /
SEMI-TRASH PUMPS / TRASH PUMPS
2-INCH / 3-INCH / 4-INCH

Semi-Trash Pumps

2 and 3-Inch

WATER PUMPS



WTP-S03-2MGM

Dependability is key when you need to remove unwanted water fast and efficiently. These compact, lightweight and portable Mi-T-M 2-inch and 3-inch semi-trash pumps get the job done for homeowners, hobby farmers and contractors.

Frame:

Heavy-duty power coated wraparound frame with 1-inch steel tubing ♦ Rubber isolators to minimize vibration

Components:

Silicon carbide mechanical seals ♦ Precision molded cast iron impeller and volute for reduced vibration and wear

Limited Warranties:

1 year Mi-T-M engine ♦ 2 year pump ♦ 3 year Honda engine



2-inch suction and discharge kit, 70-0524



WTP-S02-1MGH

MODEL NUMBER	SUCTION DISCHARGE SIZE	MAX. TOTAL HEAD	SUCTION LIFT	DISPLACEMENT/ENGINE	PSI	MAX. CAPACITY	FUEL TANK CAPACITY	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
WTP-S02-1MGH	2in.x2in.	115ft.	28ft.	118cc Honda GX120 OHV	50	9,720 gph	0.53 gallon	20.5x17x16.25in.	71 lb.	62 lb.
WTP-S02-1MGM	2in.x2in.	115ft.	28ft.	212cc Mi-T-M OHV	50	9,720 gph	0.71 gallon	20.5x17x16.25in.	72 lb.	63 lb.
WTP-S03-1MGH	3in.x3in.	104ft.	28ft.	196cc Honda GX200 OHV	45	16,560 gph	0.83 gallon	21.25x17.25x18.25in.	82 lb.	73 lb.
WTP-S03-2MGM	3in.x3in.	104ft.	28ft.	212cc Mi-T-M OHV	45	16,560 gph	1.0 gallon	21.25x17.25x18.25in.	82 lb.	73 lb.

Accessories:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
15-0293	20-ft. x 2-in. green PVC hard suction hose with fittings	2-inch models	15-0294	20-ft. x 3-in. green PVC hard suction hose with fittings	3-inch models
15-0295	50-ft. x 2-in. blue PVC soft discharge hose	2-inch models	15-0296	50-ft. x 3-in. blue PVC soft discharge hose	3-inch models
19-0628	2-in. steel suction strainer with round openings	2-inch models	19-0629	3-in. steel suction strainer with round openings	3-inch models
70-0524	2-in. suction and discharge kit	2-inch models	70-0525	3-in. suction and discharge kit	3-inch models

3 and 4-Inch

Remove unwanted water and waste quickly with these trash pumps. Available in two sizes, they can handle solids up to 1-inch in diameter. The die cast aluminum pump makes them lightweight, extremely durable and easy to transport.



WTP-T03-OMGH

WATER PUMPS

Frame:

Heavy-duty power coated wraparound frame with 1-inch steel tubing ♦ Rubber isolators to minimize vibration

Components:

Durable silicon carbide mechanical seals ♦ Cast iron impeller and volute for reduced vibration and wear ♦ Die cast aluminum pump is lightweight and portable ♦ Easy-to-remove clean-out cover and volute for easy cleaning of debris

Limited Warranties:

2 year pump ♦ 3 year Honda engine



WTP-T04-OMGH shown with wheel kit accessory, AW-5740-0017

MODEL NUMBER	SUCTION DISCHARGE SIZE	MAX. TOTAL HEAD	SUCTION LIFT	DISPLACEMENT/ENGINE	PSI	MAX. CAPACITY	FUEL TANK CAPACITY	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
WTP-T03-OMGH	3in.x3in.	95ft.	26ft.	270cc Honda GX270 OHV	38	22,200 gph	1.39 gallons	29x21.8x22.5in.	177 lb.	152 lb.
WTP-T04-OMGH	4in.x4in.	95ft.	26ft.	389cc Honda GX390 OHV	38	34,800 gph	1.6 gallons	29x21.8x22.5in.	192 lb.	167 lb.

Accessories:

PART NUMBER	DESCRIPTION	FITS MODELS
15-0294	20-ft. x 3-in. green PVC hard suction hose with fittings	WTP-T03-OMGH
15-0296	50-ft. x 3-in. blue PVC soft discharge hose	WTP-T03-OMGH
19-0629	3-in. steel suction strainer with round openings	WTP-T03-OMGH
70-0525	3-in. suction and discharge kit	WTP-T03-OMGH
AW-5740-0017	Wheel kit	All models
15-0356	20-ft. x 4-in. green PVC hard suction hose with fittings	WTP-T04-OMGH
15-0357	50-ft. x 4-in. blue PVC soft discharge hose	WTP-T04-OMGH
19-0277	4-in. steel suction strainer with round openings	WTP-T04-OMGH
70-0661	4-in. suction and discharge kit	WTP-T04-OMGH



4-inch suction and discharge kit, 70-0661



**Cold & Hot Water Pressure Washers • Air Compressors
Portable Generators • Air Compressor/Generator Combinations
Air Compressor/Generator/Welder Combinations
Wet/Dry Vacuums • Jobsite Boxes • Portable Heaters
Water Pumps • Water Treatment Systems**